



# OX2500-CF Unit

2500 CFM Media Filtration System  
3/4 H.P. Direct Drive Fan

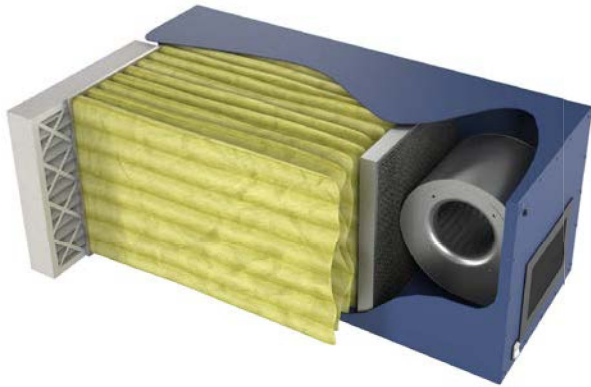

Featuring a straight through airflow, the OX2500-CF utilizes high efficiency disposable filters which have been constructed from micro glass fibers. The OX2500's housing is produced using 16 gauge Cold-Rolled steel, finished in a Polyester Powder Coating Paint. Each unit is a self-contained system and can be used individually for smaller operations or in groups for larger areas. This unit has a low air-flow-to-filter ratio that provides the highest efficiency and long filter life. Additional cabinet and filter options available. The CF Model also includes a 2" thick, 9 pound, Carbon After Filter for mild odor control. A Three Year Warranty included on all parts besides filters.

Unit Specifications		Technical Specifications	
<b>Air Flow max</b>	2500 CFM	<b>Motor Type</b>	PSC-Direct Drive
<b>Ship Weight</b>	160 lbs	<b>H.P.</b>	3/4 H.P.
<b>Hang Weight</b>	150 lbs	<b>Volts</b>	115 V
<b>Dimensions</b>	24"W x 24"T x 59"L	<b>Amps</b>	10.2
<b>Finish</b>	Blue, Brown, Black	<b>Watts</b>	950 W
<b>Grill/Louver</b>	4-Way Adjustable	<b>Noise Level</b>	62 dBA's @5

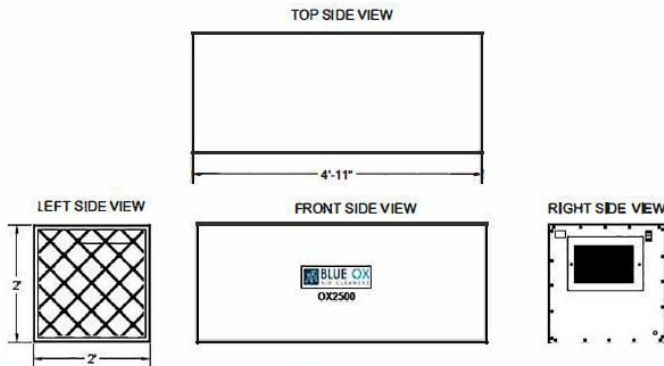

## Accessories

### Included Filters

- 24" x 24" x 4" - 35% Washable Mesh Pre Filter
- 24" x 24" x 36" - 65% 8 Pocket Bag Filter
- 24" x 24" x 2" - 9 lb. Carbon After Filter

### Optional Filters

- 24" x 24" x 4" - Aluminum Mesh Pre-Filter  
Replaces Pleated Filter
- 24" x 24" x 36" - 95% 8 Pocket Bag Filter  
Replaces 65% Bag Filter

### Cabinet Options

- Silencer with Louver  
Reduces sound 6-8 decibels
- Silencer with Grill  
Reduces sound 10-12 decibels
- Magnehelic Pressure Gauge  
Indicates when to change filters
- Eye-Bolts (4)  
Factory Installed Mounting Bolts
- Eye- Bolt Mounting Kit  
Includes Eye-Bolts, Chain and Q-Links
- Dual L-Brackets  
Underside brackets for Wall Mounting
- Strut Channel  
Underside strut for Ceiling Mounting
- Drain Plug  
Oil/Mist application drain via Hose Barb
- Ultraviolet Light Bar Catalyst  
Kills airborne bacteria, mold and Viruses
- Other options including different Motor Voltage available