


OX3000-CF Unit

2600 CFM Media Filtration System
3/4 H.P. Direct Drive Fan

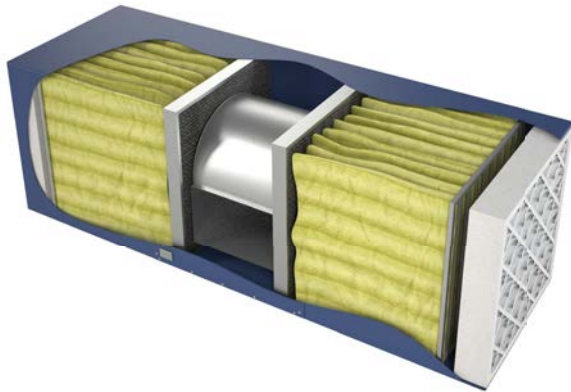

The BLUE OX3000 has been engineered with a 16-gauge Cold-Rolled steel cabinet, finished in a Polyester Powder Coating Paint. The OX3000 air cleaning system has a number of distinct advantages over conventionally designed units. Featuring a "T" pattern airflow unit with inlets on both ends and exhaust in the middle, a dual set of micro-glass fiber disposable filters provide more filter area and allow the unit to operate with considerably less static pressure. The lower airflow - to - filter ratio provides higher efficiency and longer life. Additional filter and cabinet options available including silencers. The OX3000-CF Model also includes two 2" thick Carbon After Filters for mild odor control. A Three Year Warranty included on all parts besides filters.

Unit Specifications		Technical Specifications	
Air Flow max	2600 CFM	Motor Type	Direct Drive
Ship Weight	200 lbs	H.P.	3/4 H.P. @60Hz
Hang Weight	180 lbs	Volts	115 V
Dimensions	24"W x 24"T x 72"L	Amps	10.2
Finish	Blue, Brown, Black	Watts	950 W
Grill/Louver	4-Way Adjustable	Noise Level	72 dBA's @ 5'

Accessories

Included Filters

- (2) 24" x 24" x 4" - 35% Pleated Fiber Pre-Filter
- (2) 24" x 24" x 15" - 95% 12 Pocket Bag Filter
- (2) 24" x 24" x 2" - 9 lb. Carbon After Filter

Optional Filters

- 24" x 24" x 4" - Aluminum Mesh Pre-Filter
Replaces Pleated Filter

Cabinet Options

- Silencer with Louver
Reduces sound 6-8 decibels
- Silencer with Grill
Reduces sound 10-12 decibels
- Magnehelic Pressure Gauge
Indicates when to change filters
- Eye-Bolts (4)
Factory Installed Mounting Bolts
- Eye- Bolt Mounting Kit
Includes Eye-Bolts, Chain and Q-Links
- Dual L-Brackets
Underside brackets for Wall Mounting
- Strut Channel
Underside strut for Ceiling Mounting
- Drain Plug
Oil/Mist application drain via Hose Barb
- Ultraviolet Light Bar Catalyst
Kills airborne bacteria, mold and Viruses
- Other options including different Motor Voltage available

