



OX4000-1x2 Unit

4000 CFM Media Filtration System
2.0 H.P Belt Driven Fan

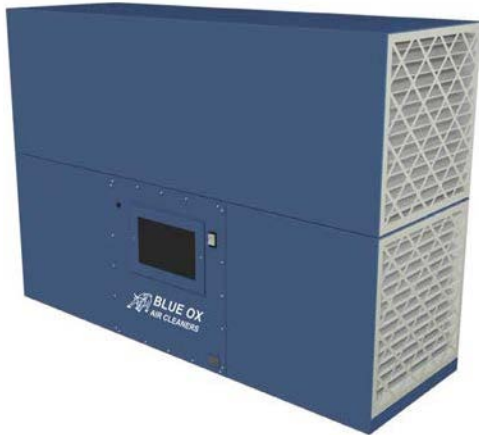

The Blue OX4000 unit was developed primarily for larger installations where there is a heavy contamination load and a lot of area to be cleaned. These multi-unit setups have higher filter cloth-to-air ratios, resulting in a significant savings in maintenance and less overall units required. Our 1x2 Units have twice the filter surface area of a single unit, resulting in over three times the filter life. The OX4000 filter systems can be used for any application where contaminates, mist, or smoke is created. Additional unit set-ups, cabinet and filter options available. All units have a Three Year Warranty on all parts besides filters.

| Unit Specifications | | Technical Specifications | |
|---------------------|--------------------|--------------------------|-------------------|
| Air Flow max | 4000 CFM | Motor Type | TEFCBB Belt Drive |
| Ship Weight | 385 lbs | H.P. | 2.0 H.P. |
| Hang Weight | 360 lbs | Volts | 208-230 /460 V |
| Dimensions | 72"L x 24"W x 50"H | Amps | 6.0-5.8 / 2.9 |
| Finish | Blue, Brown, Black | Watts | 1248-1334 W |
| Grill/Louver | 4-Way Adjustable | Noise Level | 72 dBA's @5' |

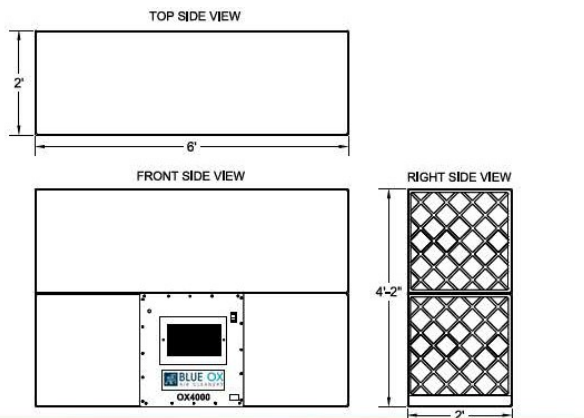

Accessories

Included Filters

- (4) 24" x 24" x 4" - 35% Pleated Fiber Pre Filter
- (4) 24" x 24" x 22" - 65% 8 Pocket Bag Filter

Optional Filters

- 24" x 24" x 4" - Aluminum Mesh Pre-Filter
Replaces Pleated Filter
- 24" x 24" x 22" - 95% 8 Pocket Bag Filter
Replaces 65% Bag Filter

Cabinet Options

- Silencer with Louver
Reduces sound 6-8 decibels
- Silencer with Grill
Reduces sound 10-12 decibels
- Magnehelic Pressure Gauge
Indicates when to change filters
- Strut Channel
Underside strut for Ceiling Mounting
- Dra in Plug
Oil/Mist application drain via Hose Barb
- Ultraviolet Light Bar Catalyst
Kills airborne bacteria, mold and Viruses
- Other options including different Motor Voltage available