



# OX4000-2x3 Unit

4000 CFM Media Filtration System  
2.0 H.P Belt Driven Fan

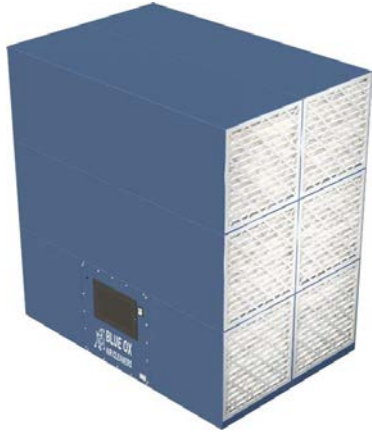

The Blue OX4000 unit was developed primarily for larger installations where there is a heavy contamination load and a lot of area to be cleaned. These multi-unit setups have higher filter cloth-to-air ratios, resulting in a significant savings in maintenance and less overall units required. Our 2x3 Units have six times the filter surface area of a single unit, resulting in over three times the filter life. The OX4000 filter systems can be used for any application where contaminates, mist, or smoke is created. Additional unit setups, cabinet and filter options available. All units have a Three Year Warranty on all parts besides filters.

Unit Specifications		Technical Specifications	
<b>Air Flow max</b>	4000 CFM	<b>Motor Type</b>	TEFCBB Belt Drive
<b>Ship Weight</b>	830 lbs	<b>H.P.</b>	2.0 H.P.
<b>Hang Weight</b>	790 lbs	<b>Volts</b>	208-230 /460 V
<b>Dimensions</b>	72"L x 48"W x 74"H	<b>Amps</b>	6.0-5.8 / 2.9
<b>Finish</b>	Blue, Brown, Black	<b>Watts</b>	1248-1334 W
<b>Grill/Louver</b>	4-Way Adjustable	<b>Noise Level</b>	72 dBA's @5'

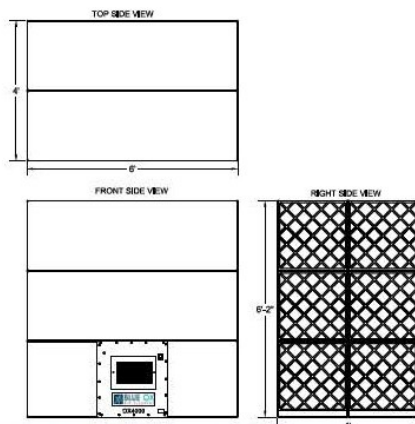

## Accessories

### Included Filters

- (12) 24" x 24" x 4" - 35% Pleated Fiber Pre Filter
- (12) 24" x 24" x 22" - 65% 8 Pocket Bag Filter

### Optional Filters

- 24" x 24" x 4" - Aluminum Mesh Pre-Filter  
Replaces Pleated Filter
- 24" x 24" x 22" - 95% 8 Pocket Bag Filter  
Replaces 65% Bag Filter

### Cabinet Options

- Silencer with Louver  
Reduces sound 6-8 decibels
- Silencer with Grill  
Reduces sound 10-12 decibels
- Magnehelic Pressure Gauge  
Indicates when to change filters
- Strut Channel  
Underside strut for Ceiling Mounting
- Drain Plug  
Oil/Mist application drain via Hose Barb
- Ultraviolet Light Bar Catalyst  
Kills airborne bacteria, mold and Viruses
- Other options including different Motor Voltage available