


# OX4500-3x1 Unit

4500 CFM Media Filtration System  
3.0 H.P Belt Driven Fan



The Blue OX4500 unit was developed primarily for larger installations where there is a heavy contamination load and a lot of area to be cleaned. These multi-unit setups have higher filter cloth-to-air ratios, resulting in a significant savings in maintenance and less overall units required. Our 3x1 Units have triple the filter surface area of a single unit, resulting in over three times the filter life. The OX4500 filter systems can be used for any application where contaminates, mist, or smoke is created. Additional unit set-ups, cabinet and filter options available. All units have a Three Year Warranty on all parts besides filters.

Unit Specifications		Technical Specifications	
<b>Air Flow max</b>	4500 CFM	<b>Motor Type</b>	TEFCBB Belt Drive
<b>Ship Weight</b>	585 lbs	<b>H.P.</b>	3.0 H.P.
<b>Hang Weight</b>	550 lbs	<b>Volts</b>	230 /460 V
<b>Dimensions</b>	72"L x 72"W x 26"H	<b>Amps</b>	8.6 / 4.3 Max
<b>Finish</b>	Blue, Brown, Black	<b>Watts</b>	~2000 W
<b>Grill/Louver</b>	4-Way Adjustable	<b>Noise Level</b>	72 dBA's @5'

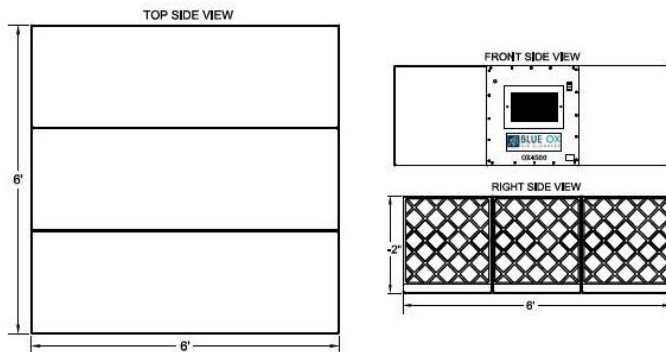

## Accessories

### Included Filters

- (6) 24" x 24" x 4" - 35% Pleated Fiber Pre Filter
- (6) 24" x 24" x 22" - 65% 8 Pocket Bag Filter

### Optional Filters

- 24" x 24" x 4" - Aluminum Mesh Pre-Filter  
Replaces Pleated Filter
- 24" x 24" x 22" - 95% 8 Pocket Bag Filter  
Replaces 65% Bag Filter

### Cabinet Options

- Silencer with Louver  
Reduces sound 6-8 decibels
- Silencer with Grill  
Reduces sound 10-12 decibels
- Magnehelic Pressure Gauge  
Indicates when to change filters
- Strut Channel  
Underside strut for Ceiling Mounting
- Drain Plug  
Oil/Mist application drain via Hose Barb
- Ultraviolet Light Bar Catalyst  
Kills airborne bacteria, mold and Viruses
- Other options including different Motor Voltage available