


# OX7600-2x3 Unit

7600 CFM Media Filtration System  
5.0 H.P Belt Driven Fan



The OX7600-2x3 unit was developed primarily for the larger installations where there is a heavy contamination load and a lot of area to be cleaned. Because of the higher air delivery of each unit, the total number of units is considerably less than usual, resulting in a significant savings in both installation and servicing costs. Make-up air costs can be reduced by up to 80% over other methods with its 7600 CFM of power. The OX7600 series "T" pattern air flow and disposable micro-glass filters allow easy and cost effective maintenance. A Three Year Warranty included on all parts besides filters.

Unit Specifications		Technical Specifications	
<b>Air Flow max</b>	7600 CFM	<b>Motor Type</b>	TEFCBB Belt Drive
<b>Ship Weight</b>	865 lbs	<b>H.P.</b>	5.0 H.P.
<b>Hang Weight</b>	825 lbs	<b>Volts</b>	230 /460 V
<b>Dimensions</b>	82"L x 48"W x 76"H	<b>Amps</b>	14.0-13.0/6.5 A
<b>Finish</b>	Blue, Brown, Black	<b>Watts</b>	~3000 W
<b>Grill/Louver</b>	4-Way Adjustable	<b>Noise Level</b>	82 dBA's @5'

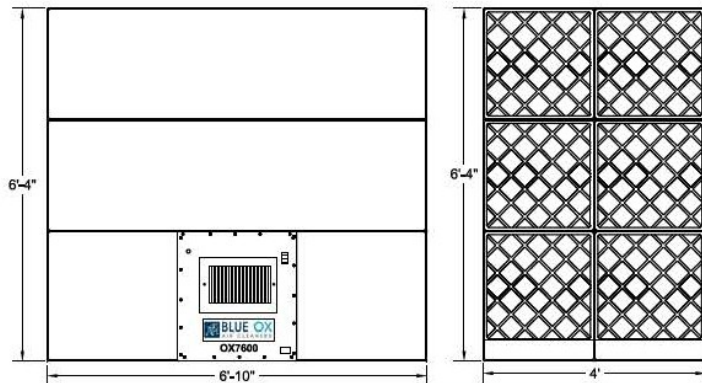

## Accessories

### Included Filters

- (12) 24" x 24" x 4" - 35% Pleated Fiber Pre Filter
- (12) 24" x 24" x 22" - 65% 8 Pocket Bag Filter

### Optional Filters

- 24" x 24" x 4" - Aluminum Mesh Pre-Filter  
Replaces Pleated Filter
- 24" x 24" x 22" - 95% 8 Pocket Bag Filter  
Replaces 65% Bag Filter

### Cabinet Options

- Silencer with Louver  
Reduces sound 6-8 decibels
- Silencer with Grill  
Reduces sound 10-12 decibels
- Magnehelic Pressure Gauge  
Indicates when to change filters
- Strut Channel  
Underside strut for Ceiling Mounting
- Drain Plug  
Oil/Mist application drain via Hose Barb
- Ultraviolet Light Bar Catalyst  
Kills airborne bacteria, mold and Viruses
- Other options including different Motor Voltage available