



OX3500C-WA Unit

3500 CFM Media Filtration System
2.0 H.P. TEFECC Single Speed Fan

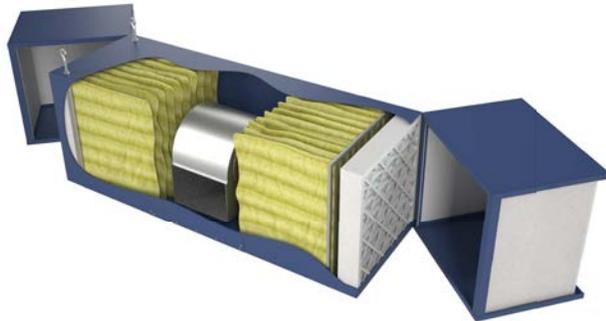

The BLUE OX3500C has been engineered with a 16-gauge Cold-Rolled steel cabinet, finished in a Polyester Powder Coating Paint. The OX3500C air cleaning system has a number of distinct advantages over conventionally designed units. Featuring a "T" pattern airflow unit with inlets on both ends and exhaust in the middle, a dual set of micro-glass fiber disposable filters provide more filter area and allow the unit to operate with considerably less static pressure. The lower airflow - to - filter ratio provides higher efficiency and longer life. Silencers and mounting kits available. The WA Model also includes a washable Wrap-A-Round Pre Filter Cage which catches large particulate to further extend filter life. A Three Year Warranty included on all parts besides filters.

Unit Specifications		Technical Specifications	
Air Flow max	3500 CFM	Motor Type	TEFCBB
Ship Weight	350 lbs	H.P.	2 H.P
Hang Weight	330 lbs	Volts	208-230/460 V
Dimensions	24"W x 26"T x 108"L	Amps	6.0-5.8 / 2.9
Finish	Blue, Brown, Black	Watts	2540 W
Grill/Louver	4-Way Adjustable	Noise Level	72 dBA's @5'

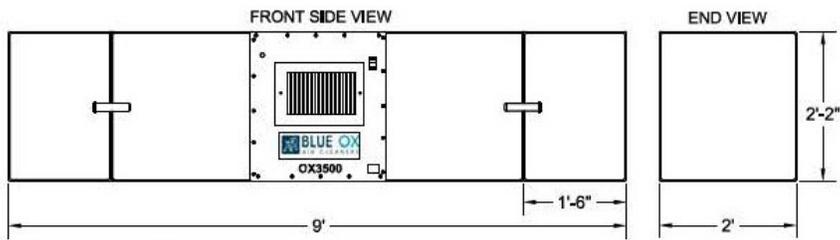

Accessories

Included Filters

- 24" x 24" x 4" - 35% Pleated Fiber Pre Filter
- 24" x 24" x 22" - 65% 8 Pocket Bag Filter
- 24" x 24" x 18" - Wrap-A-Round Pre-Filter Cages

Optional Filters

- 24" x 24" x 4" - Aluminum Mesh Pre-Filter
Replaces Pleated Filter
- 24" x 24" x 22" - 95% 8 Pocket Bag Filter
Replaces 65% Bag Filter

Cabinet Options

- Silencer with Louver
Reduces sound 6-8 decibels
- Silencer with Grill
Reduces sound 10-12 decibels
- Magnehelic Pressure Gauge
Indicates when to change filters
- Eye-Bolts (4)
Factory Installed Mounting Bolts
- Eye- Bolt Mounting Kit
Includes Eye-Bolts, Chain and Q-Links
- Dual L-Brackets
Underside brackets for Wall Mounting
- Strut Channel
Underside strut for Ceiling Mounting
- Drain Plug
Oil/Mist application drain via Hose Barb
- Ultraviolet Light Bar Catalyst
Kills airborne bacteria, mold and Viruses
- Other options including different Motor Voltage available
- 3.0 H.P. Motor Option Available for 4000 CFM