




# OX3500C Unit

3500 CFM Media Filtration System  
2.0 H.P. TEFECC Single Speed Fan

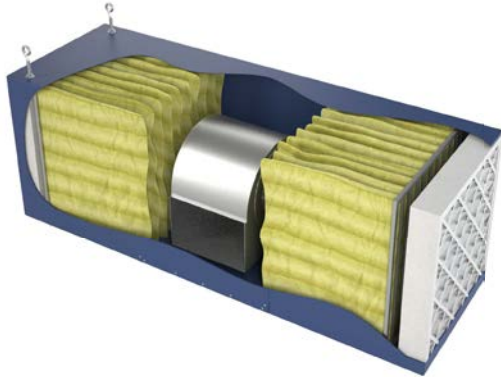

The BLUE OX3500C has been engineered with a 16-gauge Cold-Rolled steel cabinet, finished in a Polyester Powder Coating Paint. The OX3500C air cleaning system has a number of distinct advantages over conventionally designed units. Featuring a "T" pattern airflow unit with inlets on both ends and exhaust in the middle, a dual set of micro-glass fiber disposable filters provide more filter area and allow the unit to operate with considerably less static pressure. The lower airflow - to - filter ratio provides higher efficiency and longer life. Silencers and mounting kits available. A Three Year Warranty included on all parts besides filters.

Unit Specifications		Technical Specifications	
<b>Air Flow max</b>	3500 CFM	<b>Motor Type</b>	TEFCBB
<b>Ship Weight</b>	280 lbs	<b>H.P.</b>	2 H.P
<b>Hang Weight</b>	260 lbs	<b>Volts</b>	208-230/460 V
<b>Dimensions</b>	24"W x 24"T x 72"L	<b>Amps</b>	6.0-5.8 / 2.9
<b>Finish</b>	Blue, Brown, Black	<b>Watts</b>	2540 W
<b>Grill/Louver</b>	4-Way Adjustable	<b>Noise Level</b>	72 dBA's @5'

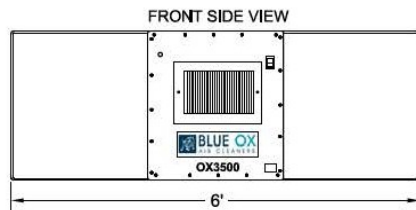

## Accessories

### Included Filters

- (2) 24" x 24" x 4" - 35% Pleated Fiber Pre-Filter
- (2) 24" x 24" x 22" - 65% 8 Pocket Bag Filter

### Optional Filters

- 24" x 24" x 4" - Aluminum Mesh Pre-Filter  
Replaces Pleated Filter
- 24" x 24" x 22" - 95% 8 Pocket Bag Filter  
Replaces 65% Bag Filter

### Cabinet Options

- Silencer with Louver  
Reduces sound 6-8 decibels
- Silencer with Grill  
Reduces sound 10-12 decibels
- Magnehelic Pressure Gauge  
Indicates when to change filters
- Eye-Bolts (4)  
Factory Installed Mounting Bolts
- Eye- Bolt Mounting Kit  
Includes Eye-Bolts, Chain and Q-Links
- Dual L-Brackets  
Underside brackets for Wall Mounting
- Strut Channel  
Underside strut for Ceiling Mounting
- Drain Plug  
Oil/Mist application drain via Hose Barb
- Ultraviolet Light Bar Catalyst  
Kills airborne bacteria, mold and Viruses
- Other options including different Motor Voltage available
- 3.0 H.P. Motor Option Available for 4000 CFM