


OX4500-2x2 Unit

4500 CFM Media Filtration System
3.0 H.P Belt Driven Fan



The Blue OX4500 unit was developed primarily for larger installations where there is a heavy contamination load and a lot of area to be cleaned. These multi-unit setups have higher filter cloth-to-air ratios, resulting in a significant savings in maintenance and less overall units required. Our 2x2 Units have four times the filter surface area of a single unit, resulting in over three times the filter life. The OX4500 filter systems can be used for any application where contaminates, mist, or smoke is created. Additional unit set-ups, cabinet and filter options available. All units have a Three Year Warranty on all parts besides filters.

Unit Specifications		Technical Specifications	
Air Flow max	4500 CFM	Motor Type	TEFCBB Belt Drive
Ship Weight	630 lbs	H.P.	3.0 H.P.
Hang Weight	610 lbs	Volts	230 /460 V
Dimensions	72"L x 48"W x 50"H	Amps	8.6 / 4.3 Max
Finish	Blue, Brown, Black	Watts	~2000 W
Grill/Louver	4-Way Adjustable	Noise Level	72 dBA's @5'

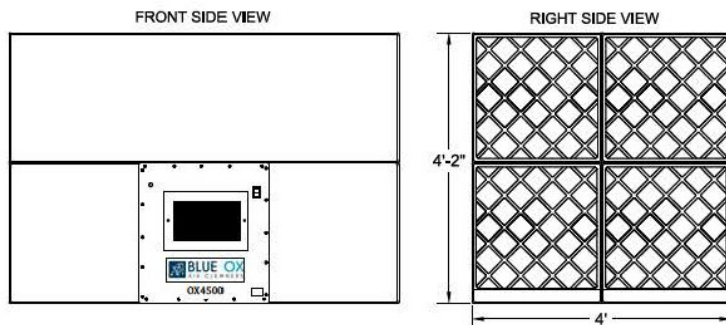

Accessories

Included Filters

- (8) 24" x 24" x 4" - 35% Pleated Fiber Pre Filter
- (8) 24" x 24" x 22" - 65% 8 Pocket Bag Filter

Optional Filters

- 24" x 24" x 4" - Aluminum Mesh Pre-Filter
Replaces Pleated Filter
- 24" x 24" x 22" - 95% 8 Pocket Bag Filter
Replaces 65% Bag Filter

Cabinet Options

- Silencer with Louver
Reduces sound 6-8 decibels
- Silencer with Grill
Reduces sound 10-12 decibels
- Magnehelic Pressure Gauge
Indicates when to change filters
- Strut Channel
Underside strut for Ceiling Mounting
- Drain Plug
Oil/Mist application drain via Hose Barb
- Ultraviolet Light Bar Catalyst
Kills airborne bacteria, mold and Viruses
- Other options including different Motor Voltage available