


OX7500-2x2 Unit

7500 CFM Media Filtration System
5.0 H.P Belt Driven Fan



The OX7500-2x2 unit was developed primarily for the larger installations where there is a heavy contamination load and a lot of area to be cleaned. Because of the higher air delivery of each unit, the total number of units is considerably less than usual, resulting in a significant savings in both installation and servicing costs. Make-up air costs can be reduced by up to 80% over other methods with its 7500 CFM of power and quadrupled filter life. The OX7500 series "T" pattern air flow and disposable micro-glass filters allow easy and cost effective maintenance. A Three Year Warranty included on all parts besides filters

Unit Specifications		Technical Specifications	
Air Flow max	7500 CFM	Motor Type	TEFCBB Belt Drive
Ship Weight	700 lbs	H.P.	5.0 H.P.
Hang Weight	670 lbs	Volts	230 /460 V
Dimensions	82"L x 48"W x 52"H	Amps	14.0-13.0/6.5 A
Finish	Blue, Brown, Black	Watts	~3000 W
Grill/Louver	4-Way Adjustable	Noise Level	82 dBA's @5'

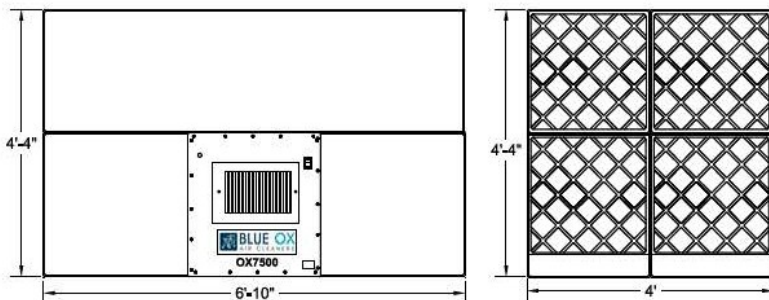

Accessories

Included Filters

- (8) 24" x 24" x 4" - 35% Pleated Fiber Pre Filter
- (8) 24" x 24" x 22" - 65% 8 Pocket Bag Filter

Optional Filters

- 24" x 24" x 4" - Aluminum Mesh Pre-Filter
Replaces Pleated Filter
- 24" x 24" x 22" - 95% 8 Pocket Bag Filter
Replaces 65% Bag Filter

Cabinet Options

- Silencer with Louver
Reduces sound 6-8 decibels
- Silencer with Grill
Reduces sound 10-12 decibels
- Magnehelic Pressure Gauge
Indicates when to change filters
- Strut Channel
Underside strut for Ceiling Mounting
- Drain Plug
Oil/Mist application drain via Hose Barb
- Ultraviolet Light Bar Catalyst
Kills airborne bacteria, mold and Viruses
- Other options including different Motor Voltage available